




P2043SK

HMI with 4.3" TFT LCD display


- ✧ Cortex 600 MHz Processor
- ✧ PCB coating for Stability in Harsh Environment
- ✧ Fan-less Design for Cooling Method
- ✧ High Noise Immunity Design for Industrial Application

Display	Panel Size	4.3" TFT (16:9)	I/O Port	Serial 1 (DB-9)	RS-232 (2W) RS-422/485 (4W)
	Panel Resolution	480 X 272		Serial 2 (Terminal Blocks)	-
	Brightness	500 (cd/m ²)		RS-422/485 Isolation	-
	Contrast Ratio	500		Ethernet	-
	Backlight Type	LED		USB HOST	USB2.0 * 1
	Backlight Life Time	20,000 Hrs.		USB Device	USB2.0 * 1(Mini-USB)
	Colors	16.7M		Micro-SD Slot	-
	LCD Viewing Angle	50/70/70/70 (T/B/L/R)		Audio Output	-
Touch	Type	4-wire Resistive Type	I/O Extension	Video Input	-
	Accuracy	X axis±2%; Y axis±2%		Termination Switch	-
Memory	Flash	128M	Dimension / Weight	PLC Extension	-
	RAM	128M		Dimensions W x H x D	128.0*102.0*36.4 (mm)
System	CPU	32 bit RISC Cortex 600MHz		Cut-out	118.5*92.5 (mm)
Power	Power Input Range	24VDC±20%	RTC	Weight	215 (g)
	Isolation Resistance	Exceed 50MΩ at 500VDC		Yes	
	Power Consumption	5.5W (@24VDC)	Software	FvDesigner V1.5.21 or later versions	
Environment	Protection Structure	Front panel : IP65 / Rear Case : IP20			
	PCB Coating	Yes			
	Operating Temp	0~50°C			
	Storage Temp	-20 ~ 60°C			
	Relative Humidity	10%~90% (40°C Non-condensing)			
	Withstand Voltage	500VAC/20mA/1 Min. (between charger & FG terminals)			
	Vibration Endurance	5 to 9Hz Half-amplitude: 3.5mm ; 9 to 150 Hz Constant acceleration: 19.6m/s ² (2G) ; 3 directions of X, Y, Z: 10times (IEC61131-2 complaints)			
Certification	CE				




◆ **Dimensions Drawing – P2043SK**

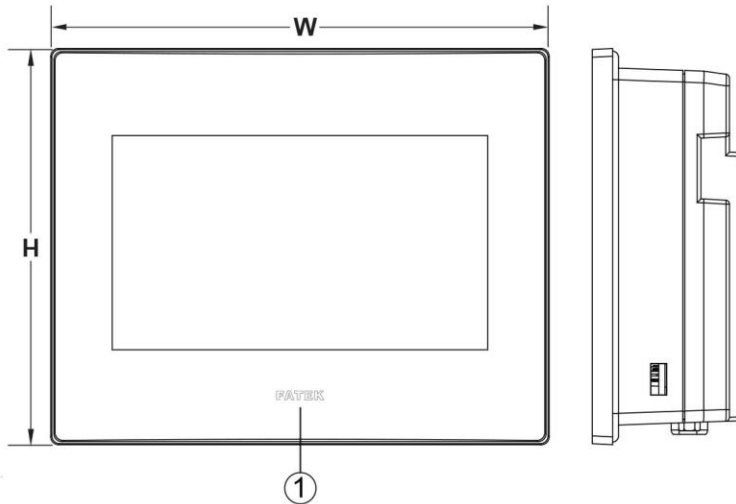


W	128.0 mm
H	102.0 mm
D	38.1 mm

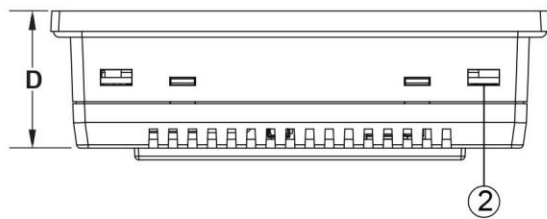

①	Power Indicator Light
②	Mounting Hole
③	Power Connector
④	COM1/COM2 DB-9 Male Connector
⑤	USB Connector
⑥	Mini USB Connector

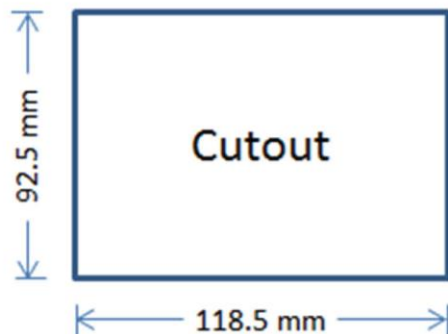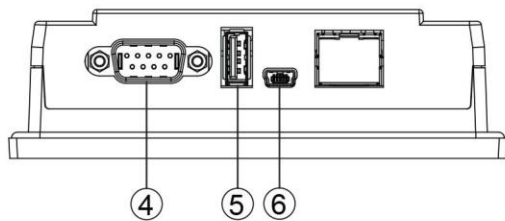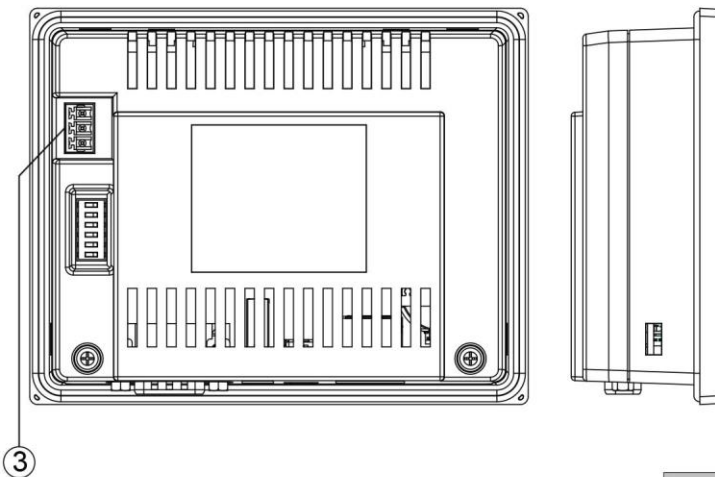

DB-9 Male Connector

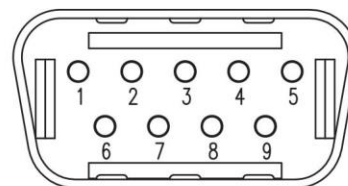

PIN#	COM1 [RS-232]	COM2 [RS-422]	COM2 [RS-485]
1	NC ^{*1}	TX+	DATA+
2	RX	NC	NC
3	TX	NC	NC
4	NC	RX+	NC
5	GND	GND	GND
6	NC	TX-	DATA-
7	NC	NC	NC
8	NC	NC	NC
9	NC	RX-	NC

*1 NC: No Connection